

Features:

- Compact for efficient storage
- Fully portable, fits through any door frame
- Easy access for elderly or disabled patients
- Adjustable seating height allowing for multi chairs
- Accommodates the 95th percentile human dimensions
- Solid construction for increased durability
- Maximum comfort and freedom

Dimensions:

Width: 660mm

Depth: 880mm

Height: 1580mm (with casters)

Weight: 120kg



Ergonomically designed for increased performance and reliability

The Personal Acoustic Enclosure (PAE) eliminates huge cost and space limitations for a diverse range of testing situations including medical centres, optical centres, and stand-alone outlets. Developed by Tectvs Architecture and an acoustic engineer, the PAE is designed specifically for audiometric evaluations.

The PAE is ergonomically designed for increased performance and reliability and is affordably priced for Hearing Aid Dispensers, medical practitioners and industrial applications.

SPECIFICATIONS

4 panel socket (internal & external)



Clear vision Perspex door



Caster legs for easy mobility



Adjustable seat



High density lined acoustic curtain



PAE FRONT VIEW
RIGHT HAND DOOR OPENING

The insertion loss (IL) of the Acoustic booth is calculated as Insertion loss = SPL of Reverberant Chamber – SPL inside Acoustic Booth.

Freq.	un-manned	manned
50	-1.9	-3.9
63	-1.5	-3.2
80	2.5	-1.3
100	9.1	3.9
125	15.1	10.9
160	15.0	13.3
200	13.9	14.3
250	15.2	14.6
315	19.3	18.2
400	20.6	20.3
500	19.3	19.9
630	21.0	18.7
800	21.7	18.6
1000	20.7	19
1250	16.6	17.6
1600	18.7	19.4
2000	22.0	22.7
2500	21.1	22.1
3150	20.7	20.7
4000	21.9	22.1
5000	22.0	22.4
6300	24.1	24.5
8000	23.8	23.9
10000	24.8	25.1

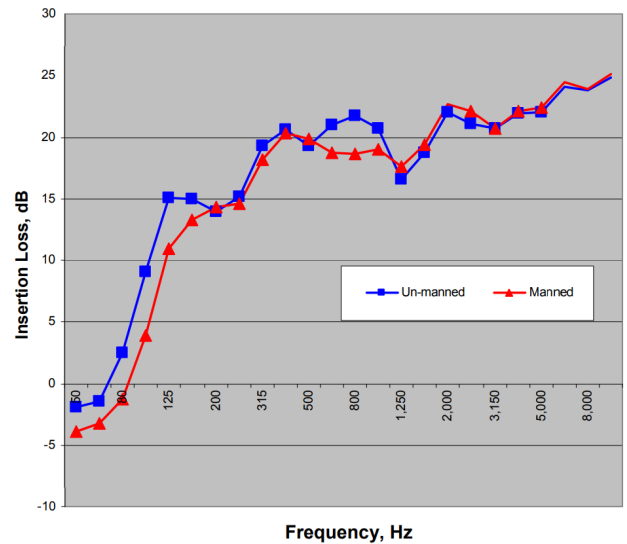


Table (above). Calculated IL for the unmanned, and manned acoustic booth.

Graph of insertion loss for the acoustical booth manned and un-manned.

One stop shop for all your audiological needs

629 Nudgee Road
Nundah QLD 4012

Freecall 1800 639 263
Fax +61 7 3256 8088

info@soniceq.com
www.soniceq.com

SONIC
EQUIPMENT