


# Technical data sheet

OTICON | Open

IIC 75

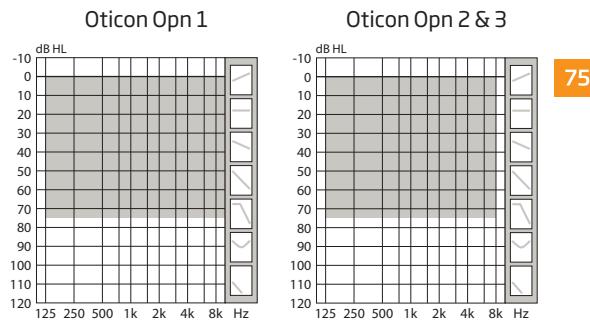

|                                      | Oticon Opn 1                                 | Oticon Opn 2                 | Oticon Opn 3                 |                              |
|--------------------------------------|--|------------------------------|------------------------------|------------------------------|
| Speech Understanding                 | OpenSound Navigator™<br>- Max. noise removal | Level 1<br>9 dB              | Level 2<br>5 dB              | Level 3<br>3 dB              |
| Sound Quality                        | Speech Guard™ LX                             | Level 1                      | Level 2                      | Level 3                      |
| Listening Comfort                    | Soft Speech Booster LX                       | •                            | •                            | •                            |
|                                      | Speech Rescue™ LX                            | •                            | •                            | •                            |
| Personalisation & Optimising Fitting | Clear Dynamics                               | •                            | •                            | -                            |
|                                      | Fitting Bandwidth*                           | 10 KHz                       | 8 KHz                        | 8 KHz                        |
|                                      | Processing Channels                          | 64                           | 48                           | 48                           |
| Listening Comfort                    | Transient Noise Management                   | 4 configurations             | On/Off                       | On/Off                       |
|                                      | Feedback shield LX                           | •                            | •                            | •                            |
|                                      | YouMatic™ LX                                 | 3 configurations             | 2 configurations             | 1 configuration              |
|                                      | Fitting Bands                                | 16                           | 14                           | 12                           |
|                                      | Adaptation Management                        | •                            | •                            | •                            |
|                                      | Oticon Firmware Updater                      | •                            | •                            | •                            |
|                                      | Fitting Formulas                             | VAC+, NAL-NL1+2,<br>DSL v5.0 | VAC+, NAL-NL1+2,<br>DSL v5.0 | VAC+, NAL-NL1+2,<br>DSL v5.0 |
|                                      | Acoustic Notifications                       | •                            | •                            | •                            |
|                                      | Battery life, hours**                        | 70-80                        | 70-80                        | 70-80                        |

\* Bandwidth accessible for gain adjustments during fitting

\*\* Battery size 10 - IEC PR70.

Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

- Default
- Not included



OpenSound Navigator™ continuously analyses the environment and attenuates the disturbing noise.

Oticon Opn is built on the Velox™ platform, providing frequency resolution in 64 channels (Opn 1).

Fully programmable with updatable firmware, the Velox platform is ready for the future.




IP68

| Technical data                                 |               |  | Ear Simulator   |                                    |          | 2CC Coupler   |            |          |
|--|---------------|--|---|------------------------------------|----------|---|------------|----------|
|  |               |  | IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015,<br>IEC 60118-1:1995+AMD1:1998 CSV and<br>IEC 60318-4:2010 |                                    |          | ANSI S3.22-2014, IEC 60118-0:2015<br>and IEC 60318-5:2006 |            |          |
| Oticon Opn IIC 75                              |               |  | Opn 1   | Opn 2                              | Opn 3    | Opn 1   | Opn 2      | Opn 3    |
| Frequency range Hz                             |               |  | 100-9500  | 100-7500                           | 100-7500 | 100-9200  | 100-7500   | 100-7500 |
| OSPL90   | Peak          |  |   | 119 dB SPL                         |          |   | 108 dB SPL |          |
|  | 1600 Hz       |  |   | 110 dB SPL                         |          |   | 102 dB SPL |          |
|  | HFA-OSPL90    |  |   | 111 dB SPL                         |          |   | 102 dB SPL |          |
| Full-on gain*                                  | Peak          |  |   | 53 dB                              |          |   | 41 dB      |          |
|  | 1600 Hz       |  |   | 47 dB                              |          |   | 38 dB      |          |
|  | HFA-FOG       |  |   | 46 dB                              |          |   | 38 dB      |          |
| Reference test gain                            |               |  |   | 37 dB                              |          |   | 26 dB      |          |
| Telecoil output (1600 Hz)                      | 1 mA/m field  |  |   | -                                  |          |   | -          |          |
|  | 10 mA/m field |  |   | -                                  |          |   | -          |          |
|  | SPLITS L/R    |  |   | -                                  |          |   | -          |          |
| Total harmonic distortion<br>(Input 70 dB SPL) | 500 Hz        |  |   | 2 %                                |          |   | 2 %        |          |
|  | 800 Hz        |  |   | 2 %                                |          |   | 2 %        |          |
|  | 1600 Hz       |  |   | 3 %                                |          |   | 2 %        |          |
| Equivalent input noise level                   | Omni          |  |   | 19 dB SPL                          |          |   | 18 dB SPL  |          |
| Battery consumption**                          | Typical       |  |   | 1.0 mA                             |          |   | 1.1 mA     |          |
|  | Quiescent     |  |   | 1.0 mA                             |          |   | 1.0 mA     |          |
| Battery life, calculated, hours***             |               |  |   | 100                                |          |   | 90         |          |
| IRIL (IEC 60118-13:2016)                       |               |  |   | 700/1400/2000 MHz: 40/33/11 dB SPL |          |   |            |          |

\* Measured with the gain control of the hearing aid set to its full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0+A1:1994 but without influence of feedback.

\*\* Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

\*\*\* Based on the standardised battery consumption measurement (IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

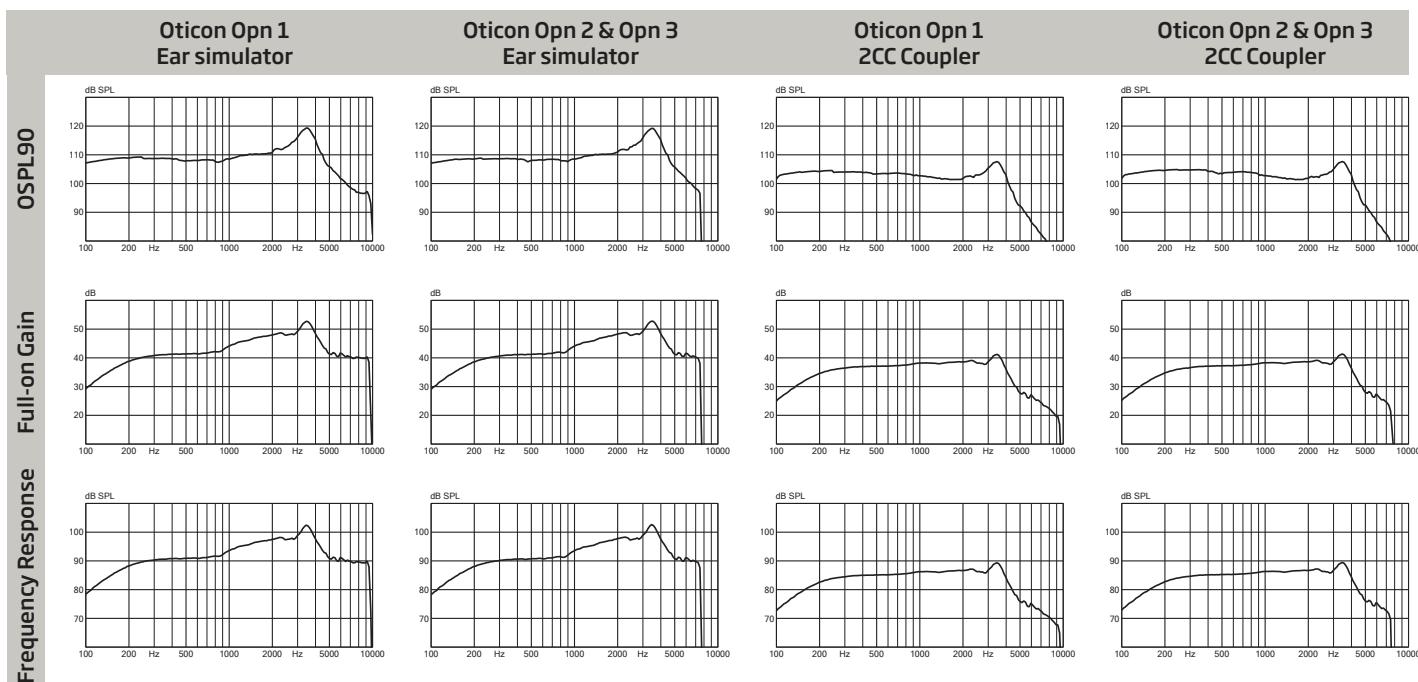

Technical information: Omnidirectional mode is used unless otherwise stated.

| Operating conditions                            | Storage and transportation conditions   |
|---|---|
| Temperature: +1°C to +40°C                      | Temperature and humidity should not exceed the following limits for extended periods during transportation and storage. |
| Relative humidity:<br>5% to 93%, non-condensing | Temperature: -25°C to +60°C<br>Relative humidity: 5% to 93%, non-condensing   |